ARV-034-K

KINETIC AIR RELEASE VALVE DN25 WITH DN20 BASE



The ARV-034-K is a kinetic air release valve. Its function is to allow air to be expelled from the pipeline during filling, and air to be admitted into the pipeline during emptying.

ADVANTAGES

- Designed to extract air from pipes, large filters, tanks or any other similar equipment which must work without the presence of air.
- Due to its design, the valve is totally sealed, even at very low pressures.
- Due to its exclusive internal design, the float is not affected by the air stream. Only water will shut the valve.
- ▷ Its neck features a built-in filter to prevent objects from getting into the valve through the outlet.
- ▶ The Valve is UV Stable.

OPERATIONS

Vents air from the pipes as they fill. When the water reaches the valve, the float rises, closing the discharge hole.

It prevents the pipeline collapsing by allowing air to be drawn in through the valve.

TECHNICAL DATA


| Pressure Classes | PN16 | |
|--------------------------|--------------------|---------------|
| Maximum working Pressure | 16 Bar (232 PSI) | |
| Temperature Range | 0°C to 80°C | |
| Connection | 20mm Male BSP | 20mm Male NPT |
| Volume of Air Extracted | 130m³/h at 0.4 bar | |
| Inlet Size | 20mm | |
| Outlet Size | 20mm | |
| Weight | 0.34kg | |
| Height | 196mm | |
| Width | 80mm | |



MATERIAL SPECIFICATIONS & PARTS LIST

| NO. | DESCRIPTION | MATERIAL |
|-----|-------------|---------------------------------|
| 1 | Base | Fibreglass-Reinforced Polyamide |
| 2 | Body | Fibreglass-Reinforced Polyamide |
| 3 | Float | Polypropylene |
| 4 * | Seal | EPDM |
| 5 * | O Ring | NBR |

^{*} Spare Parts

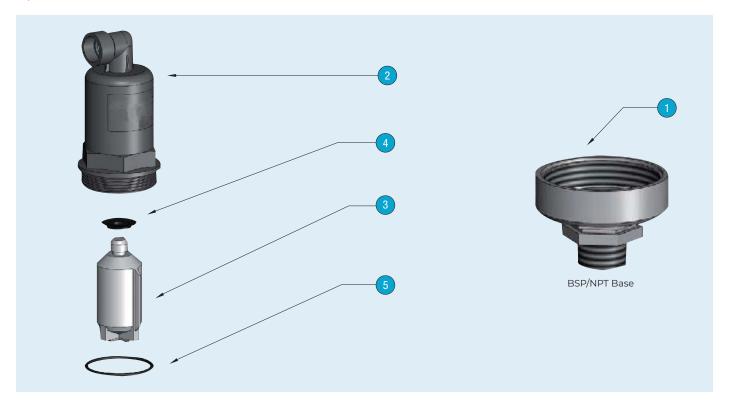

INSTALLATION

- > For correct operation, the valve should always be in a vertical position.
- ▶ It is recommended to install a manual ball valve under the ARV, in order to make maintenance and repair operations easier without shutting the whole system.
- ▶ For correct operation, valves must undergo regular routine checks. The check should include the cleaning of the internal components and inspection of the seal conditions.

AIR INFLOW & OUTFLOW





54 Enterprise Drive, Bundoora, VIC, 3083 p. 1300 789 256 | e. sales@avfi.com.au ovfi.com.au

Designs, material and specifications shown are subject to change without notice

All content is protected by Copyright and is owned and/or licensed

by AVFI Pty Ltd. Copyright© AVFI Pty Ltd

